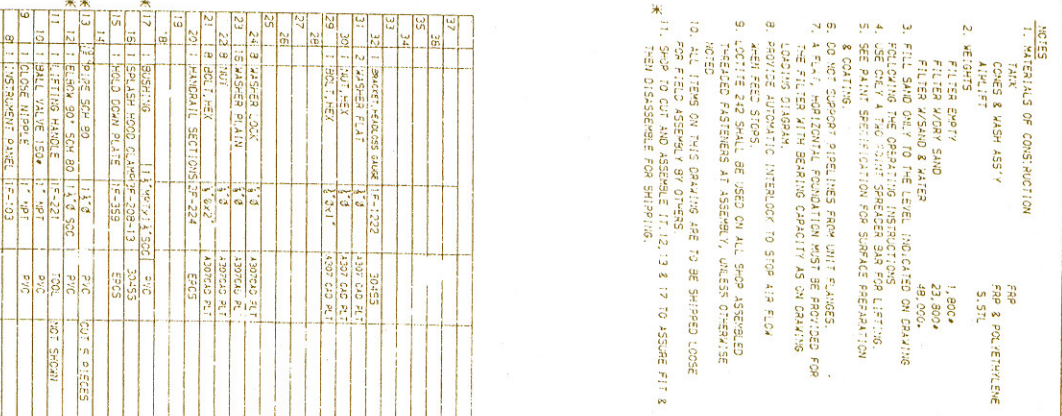
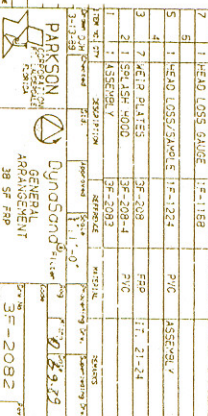


[illegible]

NOTES	
1. MATERIALS OF CONSTRUCTION	550
COSES & WASH ASSY	598 & POLYETHYLENE
APPLIC	5,511
2. WEIGHTS	
FILTER BODY	1,800*
FILTER W/OUT SAND	21,800*
FILTER W/SAND & WATER	49,000.
3. FILL SAND ONLY TO THE LEVEL INDICATED ON DRAWING	
4. FOLLOWING THE OPERATING INSTRUCTIONS	
5. USE ONLY A TONG SPECIAL BAR FOR LIFTING	
6. SEE PART SPECIFICATION FOR SURFACE PREPARATION	
7. COATING	
8. DO NOT SUPPORT PIPELINES FROM UNIT FLANGES.	
9. THE FILTER MAY BE USED FOR 10 YEARS BE PROVIDED FOR THE FILTER HAS BEARING CAPABILITY AS ON DRAWING	
10. PROVIDE AUTOMATIC INTERLOCK TO STOP AIR FLOW	
11. WHEN FIELD STOPS.	
12. LOCITE 242 SHALL BE USED ON ALL SHOP ASSEMBLED, FIELD-ASSEMBLED AND FIELD-ASSEMBLED UNLESS OTHERWISE NOTED	
13. ALL ITEMS ON THIS DRAWING ARE TO BE SHIPPED LOOSE FOR FIELD ASSEMBLY BY OTHERS	
14. THEN DISASSEMBLE FOR SHIPPING.	