

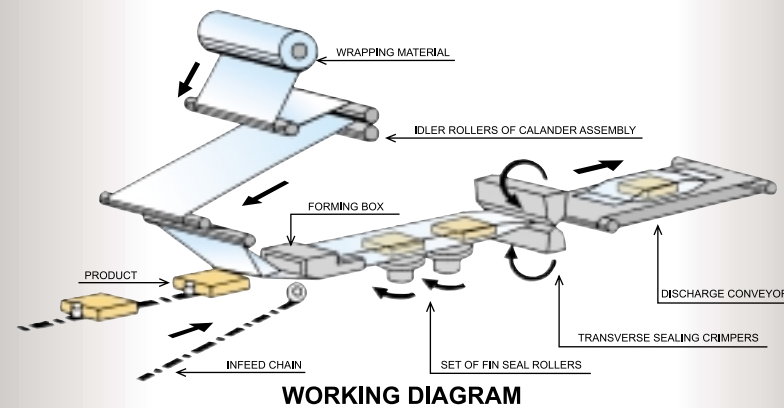



PFM-30 LAYOUT VIEW

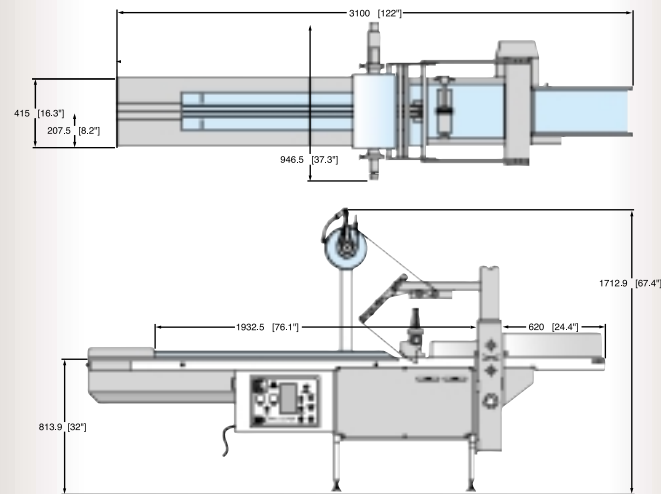

PRODUCT DIMENSIONS		
	MIN.	MAX.
A	2"	16" (M) 20" (S)
B	0.2"	9.6"
C	0.1"	4.5"
D	Max. Package perimeter 18 3/8"	

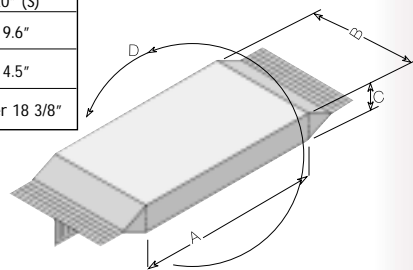

NOTE: Technical data and layout provided for reference purposes only. PFM reserves the right to change/modify technical data and layout without prior notice. Please contact PFM to confirm current specifications.



Packaging Machinery

PFM S.p.A

ITALY
Via Pasubio, 49-36036
Torrebelvicino (VI) Italy

Tel: (+39) 0445.570.110
Fax: (+39) 0445.570.175

Web: www.pfm.it
E-mail: pfm@pfm.it

PFM PACKAGING MACHINERY CORP.

USA & CANADA
1271 Ringwell Drive
Newmarket, Ontario L3Y 7V1

Tel: 905-836-6709
Fax: 905-836-7763


Web: www.pfmusa.com
E-mail: info@pfmusa.com

PFM PACKAGING MACHINERY LTD.

GREAT BRITAIN
Unit 8/9, Intercity Way
Leeds LS13-4LY

Tel: (+44) 113.23.93.401
Fax: (+44) 113.23.93.402

E-mail: pfm@pfm-ltd.co.uk

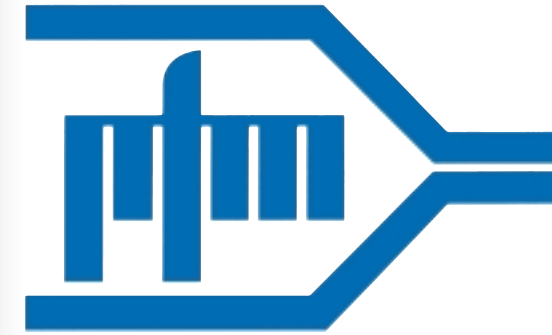

Packaging Machinery



PFM 30M / 30S

PFM 30M / 30S



Machine Description

The PFM 30 is a horizontal form fill and seal machine to produce flow packs at speeds up to 120ppm, utilizing a wide variety of packaging materials (OPP, BOPP, Laminates, HLDPE, Polyolefin, etc.)

Its compact and ergonomic design along with its total versatility make the PFM 30 the ideal machine for operations where change overs are frequent and wrapping efficiency is a critical parameter.

Standard Features

- Compact, functional design
- Fully adjustable former
- Keypad control (30 S)
- Dog clutch to engage/disengage crimpers
- 5' (1.5mt.) infeed conveyor
- One film roll holder for a max. film width of 19.6"(500mm)
- Jaws up to 9.8" (250mm) wide and 6.7"(170mm) diameter
- Adjustable crimper height
- Easily removable product pushers
- Two sets of finwheels
- Torque limiter on crimperhead
- All parts in contact with the product are stainless steel or food approved plastic
- Two temperature controllers
- 2 axis system servo control (30 S)
- High quality, food grade, powder epoxy coating
- Extensive use of nonproprietary components

Main Options

- Print registration (30 S)
- 3rd set of foldover finwheels
- Extended infeed/discharge
- 2up bolt on jaws
- Hole punch jaws
- Quick change pitch
- Self centering reel holder (30 S)
- Automatic infeeds (30 S)
- Full stainless version
- Shrink version

PFM 30 Super
with Self Centering Reel Holder
(Optional)


Fully Adjustable
Former



Finwheel Assembly with 3rd Set of Foldover Wheels
(Optional)



30 M Control Panel

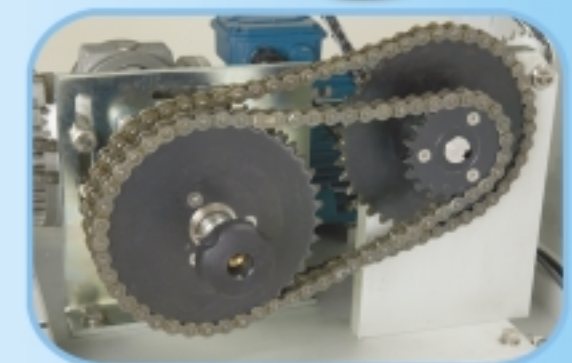

30 S Drive Assembly with Quick Change Pitch
(Optional)

